AVENTICS Series QR2 Fittings

AVENTICS Series QR2,push-in connectors with easy, secure mounting are available in many versions: In metal for tubing diameters from 3 to 16 mm. QR2 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive Oring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.

Technical data

Industry Industrial

Fitting type Push-in connector
Compressed air connection type External thread

Port G G 1/4

Compressed air connection type 2 pin bushing

Port D Ø 6

Type QR2-S-RAS

Min. working pressure -0.95 bar

Max. working pressure 16 bar

Min. ambient temperature -20 °C

Max. ambient temperature 80 °C

Delivery unit 25 piece

Weight 0.014 kg

Material

Housing material Brass

Surface housing nickel-plated

Seal material Acrylonitrile butadiene rubber

Material tooth lock washer Stainless Steel

Material release ring Brass

Surface release ring nickel-plated


Material thread Brass

Surface thread nickel-plated Part No. 1823373065

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

Thread seal with captive O-ring

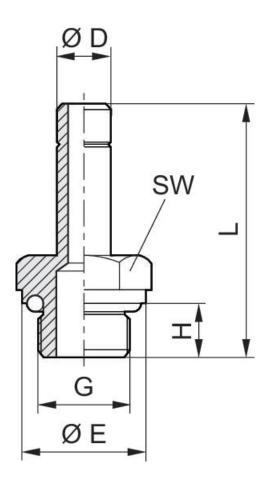

Part No.	Port D	Port G	ØE	Н	L	SW
1823373056	Ø 4	M5	8	4	24.5	8
1823373057	Ø 5	M5	8	4	25	8
1823373058	Ø 6	M5	8	4	26	8
1823373059	Ø 4	G 1/8	13	6	27.7	13
1823373060	Ø 5	G 1/8	13	6	28	13
1823373061	Ø6	G 1/8	13	6	29.5	13
1823373062	Ø 8	G 1/8	13	6	31	13
1823373063	Ø 4	G 1/4	16	8	30.2	13
1823373064	Ø 5	G 1/4	16	8	31	13
1823373065	Ø6	G 1/4	16	8	32	13
1823373066	Ø 8	G 1/4	16	8	33.5	13
1823373067	Ø 10	G 1/4	16	8	38	13
1823391810	Ø 12	G 1/4	16	8	39	13
1823373068	Ø 8	G 3/8	20	9	35.5	13
1823373069	Ø 10	G 3/8	20	9	41	13
1823373070	Ø 12	G 3/8	20	9	42	13
1823373071	Ø 14	G 3/8	20	9	44	16
1823373072	Ø 12	G 1/2	24	11	44	16
1823373073	Ø 14	G 1/2	24	11	46	16