

Datasheet

Suction cup F26 Silicone FCM

Item number: 02.01.216



- Designed for opening bags in bag filling stations.
- Also suitable to handle thin and sensitive sheets, such as paper and plastic films.
- The thin, conformable lip and clever cleat pattern prevent sensitive object/sheet to get sucked in and damaged while giving enhanced lifting force.
- FDA approved silicone material.

Technical data

Description	Unit	Value
Suction cup shape	-	Flat
Application	-	Thin paper / slip sheets / film, Food contact materials (FDA & EU), non-detectable
Suction cup design	-	Round
Characteristics	-	Bag opening/thin paper - slip sheets/film, Food contact materials (FDA & EU), non-detectable
Material	-	Silicone (SIL)
Weight, min.	oz	0.14
Suction cup model	-	F
Volume	in ³	0.098
Height	in	0.93
Outer diameter, min.	in	1.024
Outer diameter, actuated	in	1.075
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	F26 FDA
Movement, vertical max.	in	0.059
Curve radius, min.	in	0.98



Performance - Lifting forces

F26 FDA	Vertical (lb)	Parallel (lb)
5.91 -inHg	2.47	2.023
17.72 -inHg	5.62	4.72
26.58 -inHg	6.97	5.85

Material	Silicone (SIL FDA) 50° Shore
Name	Blue
Color	
Temperature, min. °F	-40.0
Temperature max. °F	392.0
Hardness °Shore A	50

Material resistance	
Alcohol	Good
Concentrated acids	Poor
Ethanol	n/a
Hydrolysis	Fair
Methanol	n/a
Oil	Poor
Oxidation	Excellent
Gasoline	Poor
Wear resistance	Good
Weather and ozone	Excellent

Dimensional drawings

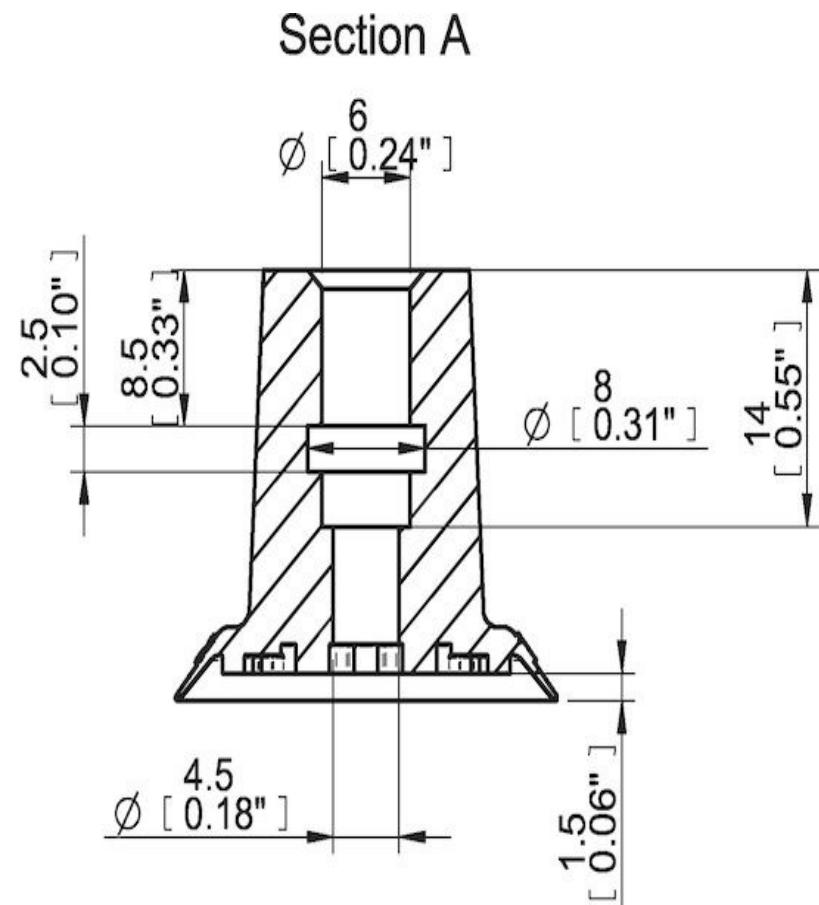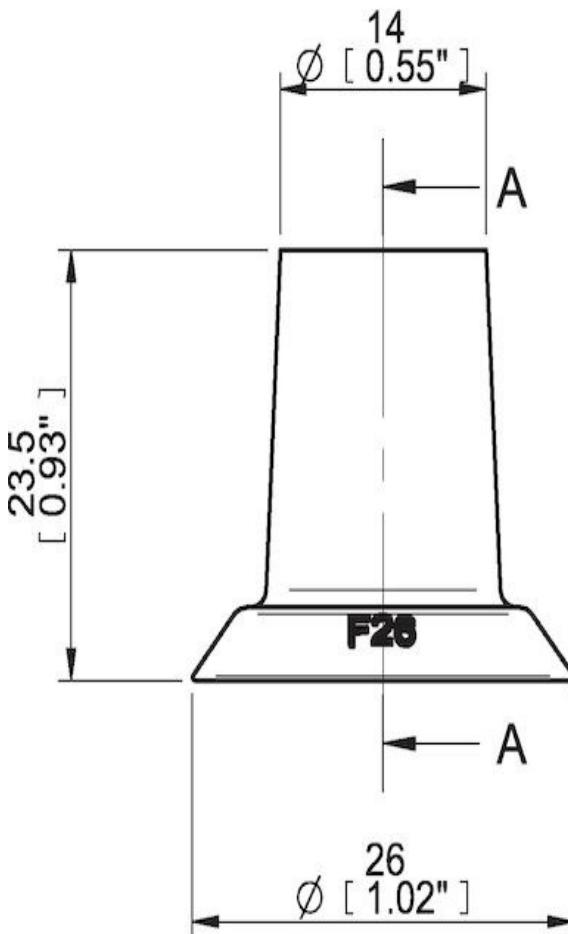

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

02.01.967 | Fitting G1/4" male
02.01.969 | Fitting 1/8" NPSF female