

Datasheet

Suction cup VL60BL

Item number: 02.02.122



- Suitable for level adjustment
- Lifting movement to separate small and thin objects
- Less suitable when the lifting force is parallel to the surface of the object
- Volume discounts available for big packs from 30-99 pieces with an even larger discount for big packs of 100 pieces and above
- PVC-free recyclable material

Technical data

| Description | Unit | Value |
|--------------------------|------|--------------|
| Suction cup shape | - | Multibellows |
| Suction cup design | - | Round |
| Material | - | TPE |
| Suction cup model | - | BL |
| Height (B) | in | 3.0039 |
| Height 2 (D) | in | 0.71 |
| Inner diameter (C) | in | 0.47 |
| Outer diameter, min. (A) | in | 2.36 |
| Fitting size | - | None |
| Fitting option | - | None |
| Fitting style | - | None |
| Fitting type | - | None |
| Suction cup model | - | VL60BL TPE-U |

Performance - Lifting forces


| VL60BL TPE-U | Vertical (lb) | Parallel (lb) |
|--------------|---------------|---------------|
| 14.76 -inHg | 10.79 N | |

Material

| | |
|------------------------|--------|
| Name | TPE-U |
| Color | Purple |
| Temperature, min. °F | 32.0 |
| Temperature max. °F | 140.0 |
| Hardness °Shore A | 65 |

Material resistance

| | |
|--------------------|-----|
| Alcohol | n/a |
| Concentrated acids | n/a |
| Ethanol | n/a |
| Hydrolysis | n/a |
| Methanol | n/a |
| Oil | n/a |
| Oxidation | n/a |
| Gasoline | n/a |
| Wear resistance | n/a |
| Weather and ozone | n/a |

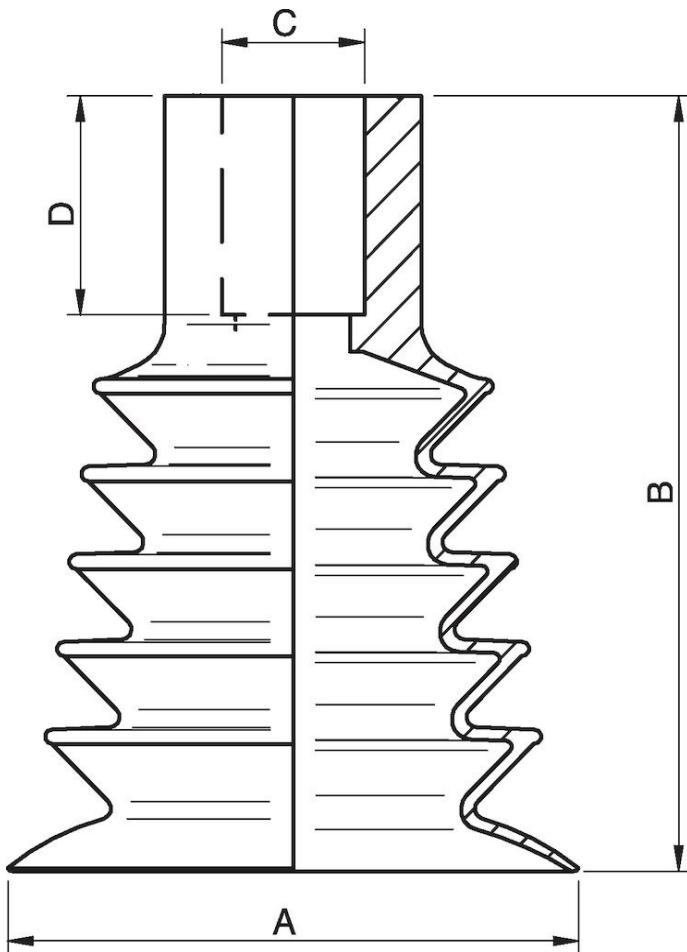

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

02.02.159 | Fitting VL D=Ø12, G1/4" - G1/8"
02.02.165 | Fitting VL D=Ø12, G3/8" - G1/4"
02.02.163 | Fitting VL D=Ø12, 1/4"NPT - 1/8"NPSF
02.02.167 | Fitting VL D=Ø12, 3/8" NPT - 1/4" NPSF