

Vacuplus MIDI Si32-2 x2, extra non-return valve

Item number: 02.23.801



Technical data


Description	Unit	Value
Material	-	Al, Nitrile (NBR), POM, SS
Temperature, max.	°F	122.0
Temperature, min.	°F	14.0
Weight, max.	oz	14.74
Feed pressure, max.	psi	0.10
Noise level, max.	dBA	73
Noise level, min.	dBA	63

Performance

Feed pressure psi	Air consumption scfm	Vacuum flow (scfm) at different vacuum levels (-inHg)													Max vacuum psi
		0	2	5	8	11	14	17	20	23	26	29	32	35	
87.0	7.42	1.95	1.77	1.54	1.0040	0.53	0.35	0.30	0.21	0	0	0	0	0	≥10.88

Feed pressure psi	Air consumption scfm	Evacuation time (s/cf) to reach different vacuum levels (-inHg)													Max vacuum psi
		2	5	8	11	14	17	20	23	26	28	29	29	29	
87.0	7.42	0.0044	0.010	0.015	0.027	0.049	0.078	0.12	0	0	0	0	0	0	≥10.88

Dimensional drawings

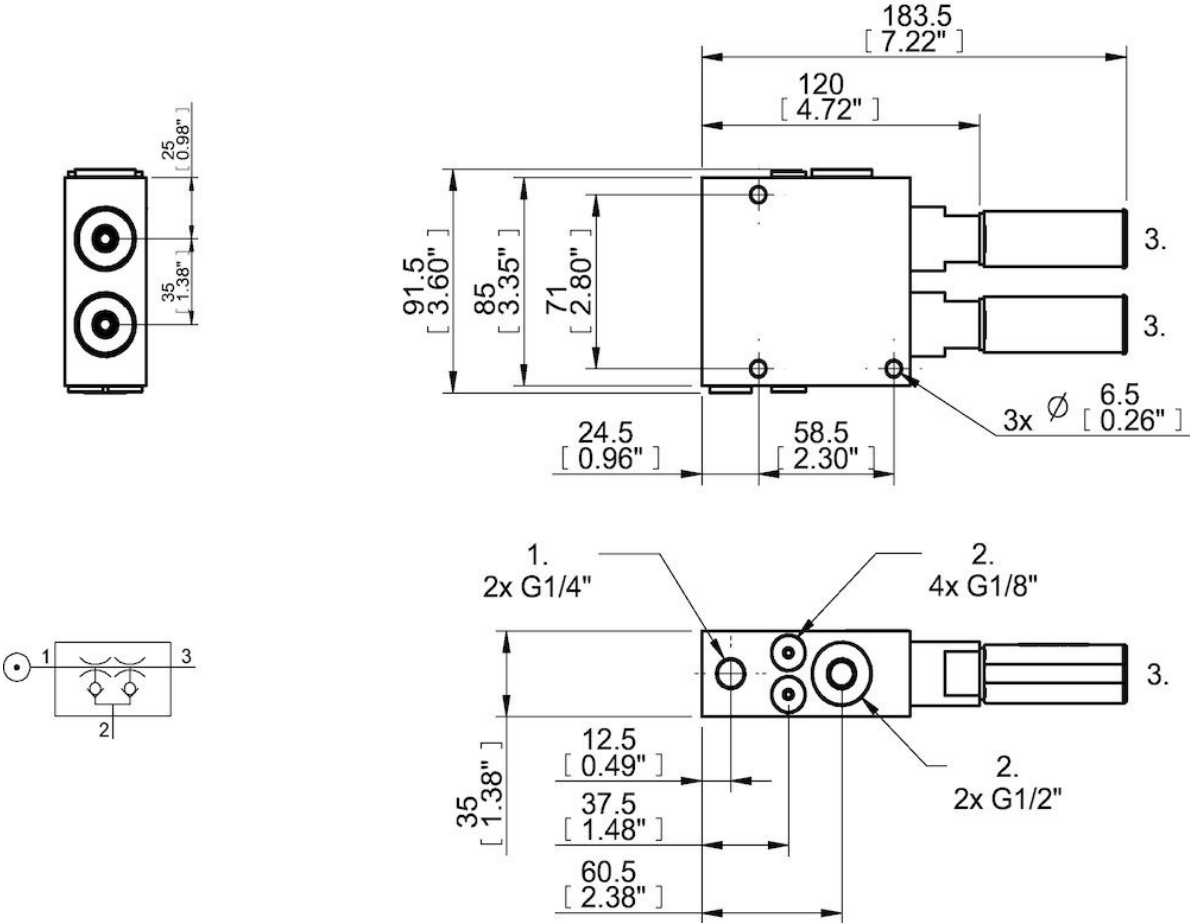

Values specified in this datasheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Compressed air quality, DIN ISO 8573-1 class 4.

Tolerance and accuracy:

- Feed pressure tolerance ±0.02 MPa [2.9 psi]
- Vacuum flow/evacuation time accuracy ±10%.