


Ball joint G1/2"

Item number: 33.50.066

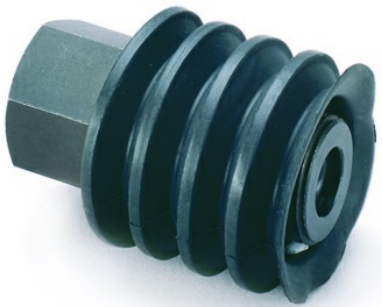


- Ball joint fittings could be used when lifting sheet metal with a device using several suction cups.
- To avoid bending stress a suction cup can be fitted with a balljoint.

Technical data

Description	Unit	Value
Material	-	Chloroprene (CR), Nitrile (NBR), PA, Steel
Bending torque, max.	lb ft	92.19
Load, max.	oz	1.76
Load, vertical, max.	lbf	112.40
Movement, angular	°	±12
Temperature, max.	°F	230.0
Temperature, min.	°F	-40.0
Weight, min.	oz	3.88

Dimensional drawings

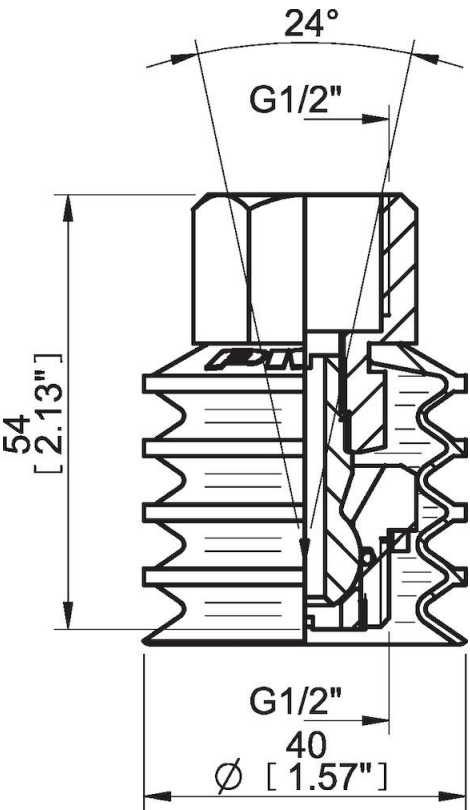

Accessories

31.07.757 | Connector ext-int G1/2"