


Ball joint G3/4"

Item number: 33.50.067

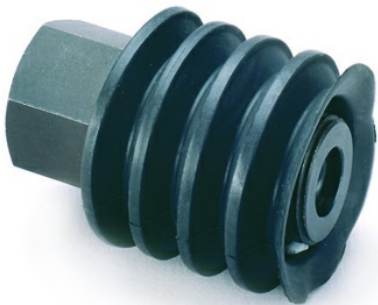

- Ball joint fittings could be used when lifting sheet metal with a device using several suction cups.
- To avoid bending stress a suction cup can be fitted with a balljoint.

Technical data

Description	Unit	Value
Material	-	Chloroprene (CR), Nitrile (NBR), PA, Steel
Bending torque, max.	lb ft	199.12
Load, max.	oz	5.29
Load, vertical, max.	lbf	337.22
Movement, angular	°	±12
Temperature, max.	°F	230.0
Temperature, min.	°F	-40.0
Weight, min.	oz	7.054

Dimensional drawings

