

Suction cup B10-2 HNBR, M5 male

Item number: B10-2.47.01AC



- Suitable for level adjustment.
- Lifting movement to separate small and thin objects.
- Only lightweight objects should be handled when the lifting force is parallel to the surface.

Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Dry sheet metal, Glass handling, High/low temp cup, Plastic injection molded parts, Mark Free
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Glass handling, High/low temp cup , Plastic injection molded parts, Mark free
Material	-	HNBR
Weight, min.	oz	0.035
Suction cup model	-	B
Volume	in ³	0.029
Height	in	0.98
Outer diameter, min.	in	0.43
Outer diameter, actuated	in	0.49
Fitting size	-	None
Fitting option	-	None
Fitting style	-	Male
Fitting type	-	M-thread
Suction cup model	-	B10-2
Movement, vertical max.	in	0.18
Curve radius, min.	in	0.16

Performance - Lifting forces


B10-2	Vertical (lb)	Parallel (lb)
5.91 -inHg	0.34	0.40
17.72 -inHg	0.76	0.54
26.58 -inHg	1.10	0.63

Material	
Name	HNBR 60° Shore A
Color	Blue
Temperature, min. °F	-22.0
Temperature max. °F	284.0
Hardness °Shore A	60

Material resistance

Alcohol	Good
Concentrated acids	Fair
Ethanol	n/a
Hydrolysis	Good
Methanol	n/a
Oil	Excellent
Oxidation	Excellent
Gasoline	Excellent
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

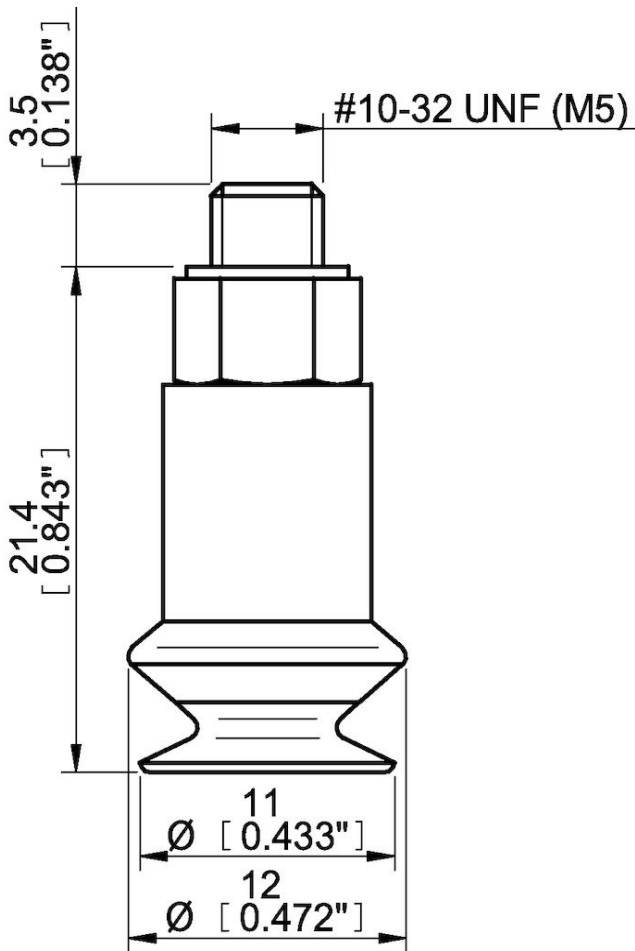

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

B10-2.10 | Suction cup B10-2 Chloroprene
 B10-2.20 | Suction cup B10-2 Silicone

Spare parts

B10-2.47 | Suction cup B10-2 HNBR

01AC | Fitting M5 male, 10–15