

Datasheet

Suction cup B15-2 HNBR, M5 male

Item number: B15-2.47.01AC



- Suitable for level adjustment.
- Lifting movement to separate small and thin objects.
- Only lightweight objects should be handled when the lifting force is parallel to the surface.

Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Dry sheet metal, Glass handling, High/low temp cup, Plastic injection molded parts, Mark Free
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Glass handling, High/low temp cup , Plastic injection molded parts, Mark free
Material	-	HNBR
Weight, min.	oz	0.053
Suction cup model	-	B
Volume	in ³	0.067
Height	in	1.11
Outer diameter, min.	in	0.62
Outer diameter, actuated	in	0.71
Fitting size	-	None
Fitting option	-	None
Fitting style	-	Male
Fitting type	-	M-thread
Width, actuated	in	0.73
Suction cup model	-	B15-2
Movement, vertical max.	in	0.26
Curve radius, min.	in	0.20

Performance - Lifting forces


B15-2	Vertical (lb)	Parallel (lb)
5.91 -inHg	0.65	0.38
17.72 -inHg	1.33	0.72
26.58 -inHg	2.00081	0.85

Material	
Name	HNBR 50° Shore A
Color	Blue
Temperature, min. °F	-22.0
Temperature max. °F	284.0
Hardness °Shore A	50

Material resistance

Alcohol	Good
Concentrated acids	Fair
Ethanol	n/a
Hydrolysis	Good
Methanol	n/a
Oil	Excellent
Oxidation	Excellent
Gasoline	Excellent
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

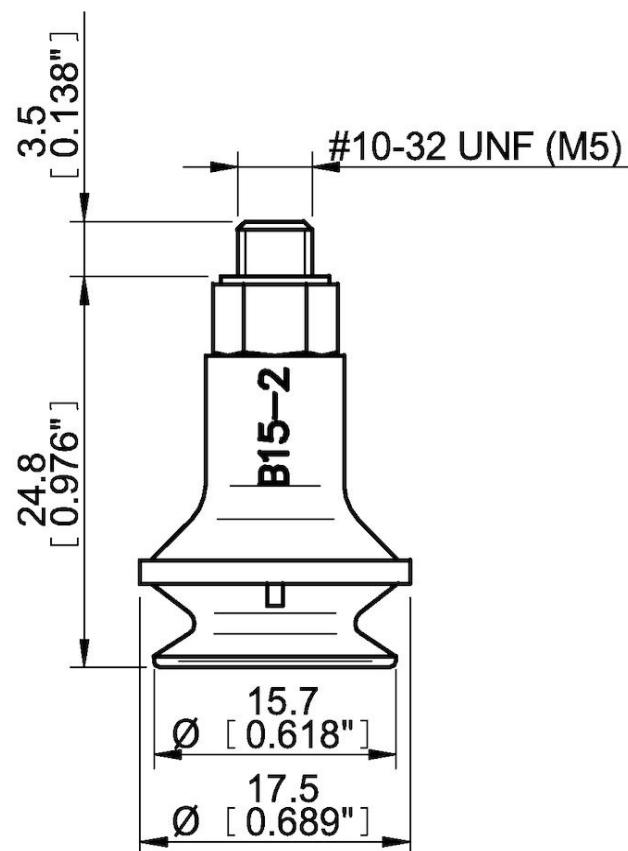

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

B15-2.10 | Suction cup B15-2 Chloroprene
 R15-2 20 | Suction cup B15-2 Silicone

Spare parts

B15-2.47 | Suction cup B15-2 HNBR

01AC | Fitting M5 male, 10-15