

Datasheet

Suction cup BF110P Polyurethane 60, thread insert G3/8" male with mesh filter

Item number: BF110P.5E.G40M



- Suitable for uneven surfaces.
- Dual hardness allowing strength and stability in conjunction with softness and flexibility.
- DURAFLEX® material features the elasticity of rubber in combination with the wear resistance of polyurethane.
- The DURAFLEX® material is mark-free.

Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Dry sheet metal, Glass handling, Mark Free
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Glass handling, Mark free
Material	-	Polyurethane (PU)
Weight, min.	oz	3.88
Suction cup model	-	BF-P
Volume	in ³	6.71
Height	in	2.48
Outer diameter, min.	in	4.55
Outer diameter, actuated	in	3.49
Fitting size	-	3/8"
Fitting option	-	Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Suction cup model	-	BF110P PU60
Movement, vertical max.	in	1.079
Curve radius, min.	in	2.76

Performance - Lifting forces


BF110P PU60	Vertical (lb)	Parallel (lb)
5.91 -inHg	36.19	27.65
17.72 -inHg	75.087	51.93
26.58 -inHg	65.87	68.57

Material	
Name	Polyurethane (PU60)
Color	Green transparent
Temperature, min. °F	50.0
Temperature max. °F	122.0
Hardness °Shore A	60

Material resistance

Alcohol	n/a
Concentrated acids	Fair
Ethanol	Fair
Hydrolysis	Fair
Methanol	Poor
Oil	Excellent
Oxidation	Poor
Gasoline	Fair
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

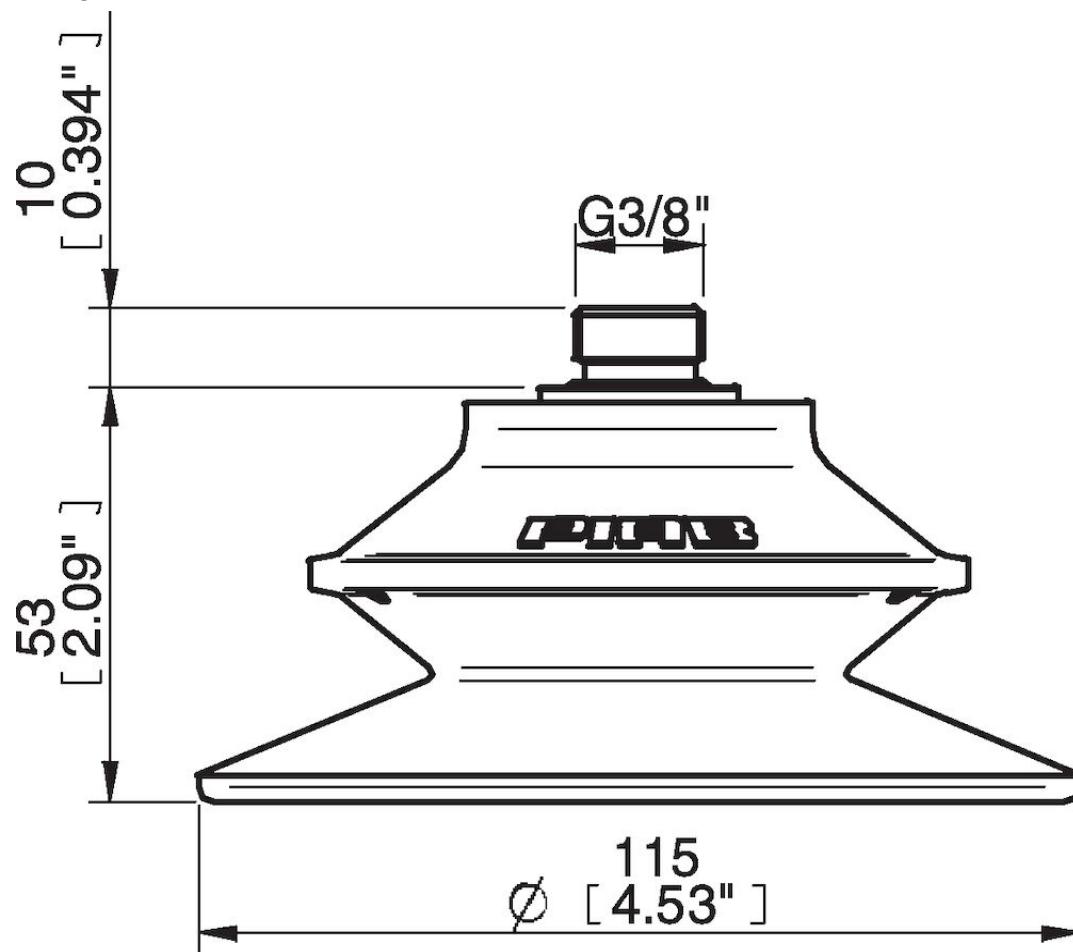

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Spare parts

01.07.148 | Thread insert G3/8" male, with O-ring and mesh filter for Vacuum Gripper System (VGS)
 RF110P 5F | Suction cup RF110P Polyurethane 60. with collar for thread insert for Vacuum Gripper System (VGS)