

Datasheet

Suction cup BFFT60P-2 Polyurethane 60/60/30 M10x1,5 male with mesh filter

Item number: BFFT60P.5V.M10MR



Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Oily sheet metal, Dry sheet metal
Suction cup design	-	Round
Characteristics	-	Oily sheet metal, Dry sheet metal
Material	-	Polyurethane (PU)
Weight, min.	oz	2.29
Suction cup model	-	BFFT
Volume	in ³	2.075
Height	in	1.33
Height 2 (Actuated)	in	0.80
Outer diameter, min.	in	2.44
Outer diameter, actuated	in	2.56
Fitting size	-	M10x1.5
Fitting option	-	Filter mesh
Fitting style	-	Male
Fitting type	-	M-thread
Fitting material	-	SS
Suction cup model	-	BFFT60P-2 Oily metal sheet
Movement, vertical max.	in	0.51
Curve radius, min.	in	1.18
Suction cup model	-	BFFT60P-2 Dry metal sheet
Movement, vertical max.	in	0.51
Curve radius, min.	in	1.18

Performance - Lifting forces


	Vertical (lb)	Parallel (lb)
BFFT60P-2 Oily metal sheet		
17.72 -inHg	29.00049	14.25
26.58 -inHg	31.70	19.69
BFFT60P-2 Dry metal sheet		
5.91 -inHg	11.24	10.027
17.72 -inHg	29.23	18.55
26.58 -inHg	32.13	20.82

Material			
Name	Polyurethane (PU30)	Polyurethane (PU60)	Polyurethane (PU60)
Color	Yellow	Green transparent	Orange
Temperature, min. °F	50.0	50.0	50.0
Temperature max. °F	122.0	122.0	122.0
Hardness °Shore A	30	60	60

Material resistance

Alcohol	n/a	n/a	n/a
Concentrated acids	Fair	Fair	Fair
Ethanol	Fair	Fair	Fair
Hydrolysis	Fair	Fair	Fair
Methanol	Poor	Poor	Poor
Oil	Excellent	Excellent	Excellent
Oxidation	Poor	Poor	Poor
Gasoline	Fair	Fair	Fair
Wear resistance	Excellent	Excellent	Excellent
Weather and ozone	Excellent	Excellent	Excellent

Dimensional drawings

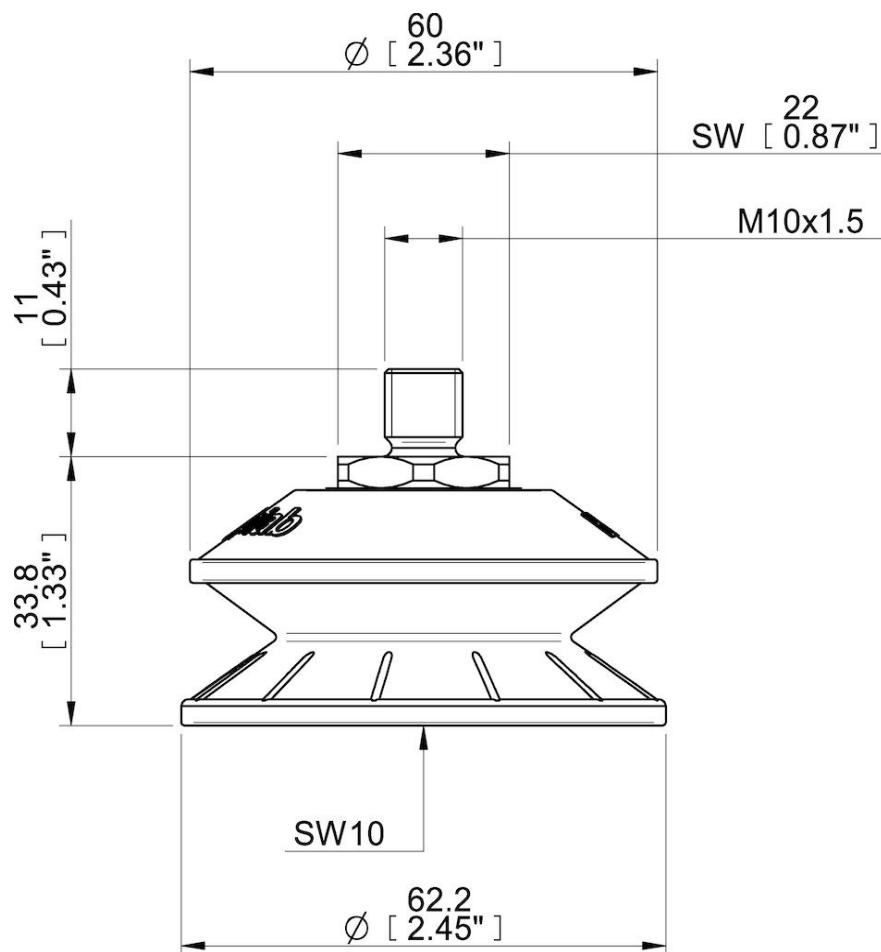

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.