

Suction cup BFFT70P Polyurethane 60/60/30, G3/8" male, 1/8" NPSF female, with mesh filter

Item number: BFFT70P.5V.G69MR



- Special designed friction cups for thin (0.6-0.8 mm) oily metal sheets, such as outer body car parts in a press-to press forming process.
- Long lasting material, normal wear on friction cup will not affect the long term grip performance.
- Refined internal friction pattern provides additional grip performance, the suction cups can withstand high shear forces, typically 3–5 times more than corresponding conventional suction cups.
- Best choice if > 0.1g/m2 press oil is used on the sheet but also a great choice for dry metal sheets.
- The "BFFT" design is suitable for thin flat or uneven/curved surfaces and if level compensation is needed, for example in de-stacking applications.
- The flat inner support, made of dual hardness, gives stability and good grip during movement in any orientation.
- DURAFLEX® suction cups manufactured in a specially developed material that features the elasticity of rubber and wear resistance of polyurethane. The material does not leave any marks on the objects handled and has a fantastic elastic memory, even after hundreds of thousands of cycles.

Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Oily sheet metal
Suction cup design	-	Round
Characteristics	-	Oily sheet metal
Material	-	Polyurethane (PU)
Weight, min.	oz	2.16
Suction cup model	-	BFFT
Volume	in ³	2.22
Height	in	1.63
Outer diameter, min.	in	2.87
Outer diameter, actuated	in	2.95
Fitting size	-	1/8", 3/8"
Fitting option	-	Filter mesh
Fitting style	-	Female/Male
Fitting type	-	G-thread, NPSF-thread
Suction cup model	-	BFFT70P Oily metal sheet
Movement, vertical max.	in	0.55
Curve radius, min.	in	3.74
Suction cup model	-	BFFT70P Dry metal sheet
Movement, vertical max.	in	0.55
Curve radius, min.	in	3.74

Performance - Lifting forces

BFFT70P Oily metal sheet	Vertical (lb)	Parallel (lb)
17.72 -inHg	37.094	24.73
26.58 -inHg	47.43	33.27
BFFT70P Dry metal sheet		
17.72 -inHg	38.67	39.57
26.58 -inHg	49.46	55.078


Material

Name	Polyurethane (PU30)	Polyurethane (PU60)	Polyurethane (PU60)
Color	Yellow	Green transparent	Orange
Temperature, min. °F	50.0	50.0	50.0
Temperature max. °F	122.0	122.0	122.0
Hardness °Shore A	30	60	60

Material resistance

Alcohol	n/a	n/a	n/a
Concentrated acids	Fair	Fair	Fair
Ethanol	Fair	Fair	Fair
Hydrolysis	Fair	Fair	Fair
Methanol	Poor	Poor	Poor
Oil	Excellent	Excellent	Excellent
Oxidation	Poor	Poor	Poor
Gasoline	Fair	Fair	Fair
Wear resistance	Excellent	Excellent	Excellent
Weather and ozone	Excellent	Excellent	Excellent

Dimensional drawings

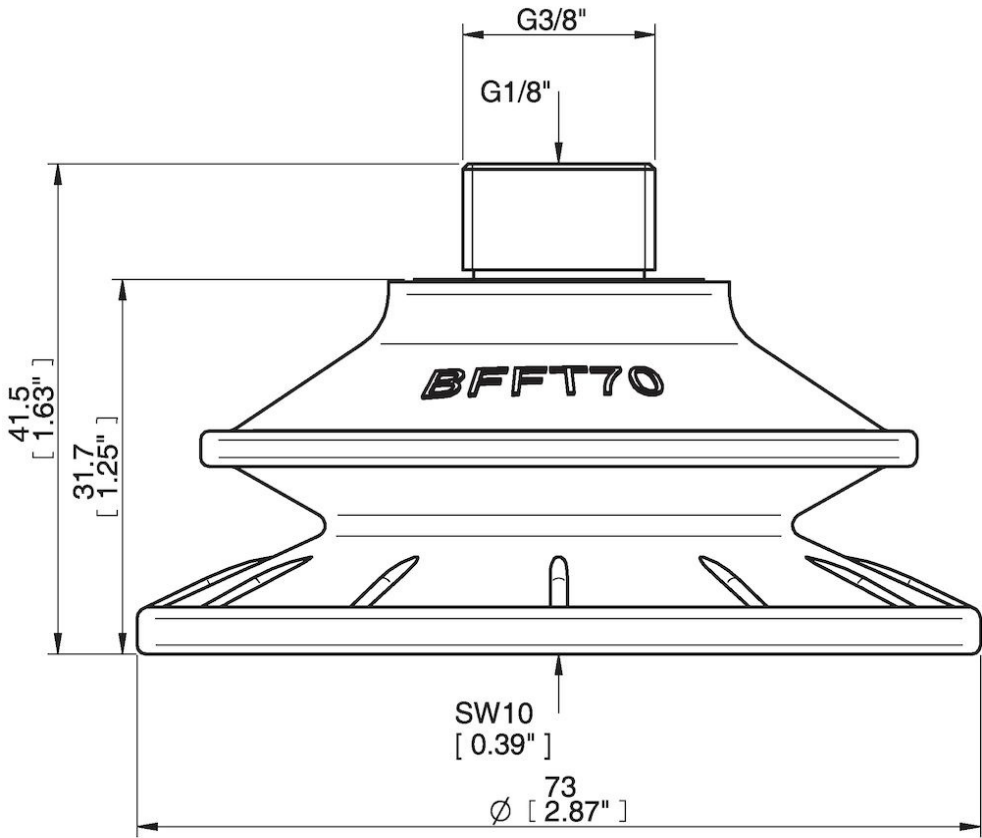

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.