

# Datasheet

## Suction cup BL20-2 Silicone, M5 female

Item number: BL20-2.20.02AA



- Suitable for level adjustment.
- Lifting movement to separate small and thin objects.
- Less suitable when the lifting force is parallel to the surface of the object.
- Optional reinforcement rings made of polyamide.

### Technical data

Description	Unit	Value
Suction cup shape	-	Multibellows
Application	-	Bag handling
Suction cup design	-	Round
Characteristics	-	Bag handling
Material	-	Silicone (SIL)
Weight, min.	oz	0.11
Suction cup model	-	BL-2
Volume	in <sup>3</sup>	0.24
Height	in	1.14
Outer diameter, min.	in	0.79
Fitting size	-	None
Fitting option	-	None
Fitting style	-	Female
Fitting type	-	M-thread
Suction cup model	-	BL20-2 reinforcement ring
Movement, vertical max.	in	0.50
Curve radius, min.	in	0.16
Suction cup model	-	BL20-2
Movement, vertical max.	in	0.50
Curve radius, min.	in	0.16

### Performance - Lifting forces


BL20-2 reinforcement ring	Vertical (lb)	Parallel (lb)
5.91 -inHg	0.74	0.83
17.72 -inHg	1.84	1.35
BL20-2		
5.91 -inHg	0.49	
17.72 -inHg	1.57	

<b>Material</b>	
Name	Silicone, SIL 50° Shore A
Color	Red
Temperature, min.   °F	-40.0
Temperature max.   °F	392.0
Hardness   °Shore A	50

#### Material resistance

Alcohol	Good
Concentrated acids	Poor
Ethanol	n/a
Hydrolysis	Fair
Methanol	n/a
Oil	Poor
Oxidation	Excellent
Gasoline	Poor
Wear resistance	Good
Weather and ozone	Excellent

#### Dimensional drawings

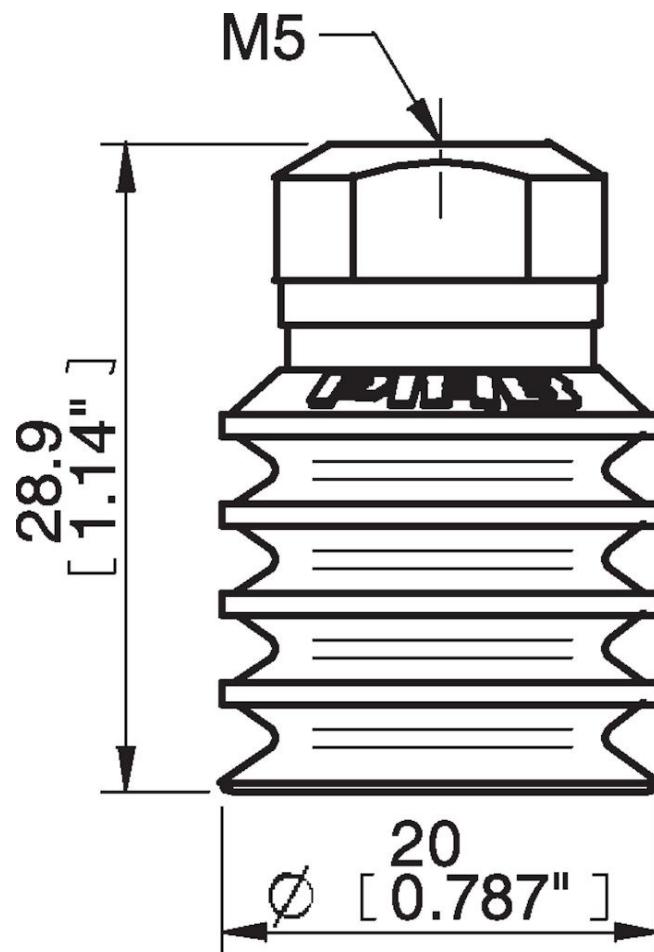

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

## **Accessories**

02AE | Fitting 5xM5 female  
BL20-2.10 | Suction cup BL20-2 Chloroprene  
02AF | Fitting G1/8" male/M5 female, with mesh filter  
BL20-2.37 | Suction cup BL20-2 HNBR  
02CD | Fitting G1/8" male/M5 female, PA  
02AD | Fitting G1/8" male/M5 female  
02AB | Fitting G1/8" male, with mesh filter  
02AC | Fitting 1/8" NPT male, with mesh filter  
02DA | Fitting M5 female, with dual flow control valve  
02DC | Fitting 1/8" NPT male, with dual flow control valve  
02DD | Fitting G1/8" male/M5 female, with dual flow control valve  
02DE | Fitting 5xM5 female, with dual flow control valve  
31.50.071 | Strengthening ring set BL20, Set of 4

## **Spare parts**

BL20-2.20 | Suction cup BL20-2 Silicone  
02AA | Fitting M5 female