

# Suction cup BX20P Polyurethane 60, 5xM5 female

Item number: BX20P.4E.02AE



- Suitable for level adjustment and for uneven and porous surfaces such as cardboard, etc.
- Dual hardness allowing strength and stability in conjunction with softness and flexibility.
- DURAFLEX® material features the elasticity of rubber in combination with the wear resistance of polyurethane.
- The DURAFLEX® material is mark-free.

Technical data

Description	Unit	Value
Suction cup shape	-	Multibellows
Application	-	Dry sheet metal, Corrugated cardboard/Paperboard, Mark Free, Plastic injection molded parts
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Corrugated / cardboard, Mark free, Plastic injection molded parts
Material	-	Polyurethane (PU)
Weight, min.	oz	0.050
Suction cup model	-	BX-P
Volume	in <sup>3</sup>	0.071
Height	in	0.95
Outer diameter, min.	in	0.83
Fitting size	-	5×M5
Fitting option	-	None
Fitting style	-	Female
Fitting type	-	M-thread
Suction cup model	-	BX20P PU60
Movement, vertical max.	in	0.30
Curve radius, min.	in	0.33

Performance - Lifting forces


BX20P PU60	Vertical (lb)	Parallel (lb)
5.91 -inHg	1.079	0.43
17.72 -inHg	1.57	1.16
26.58 -inHg	2.47	1.38

Material	
Name	Polyurethane (PU60)
Color	Green transparent
Temperature, min.   °F	50.0
Temperature max.   °F	122.0
Hardness   °Shore A	60

Material resistance

Alcohol	n/a
Concentrated acids	Fair
Ethanol	Fair
Hydrolysis	Fair
Methanol	Poor
Oil	Excellent
Oxidation	Poor
Gasoline	Fair
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

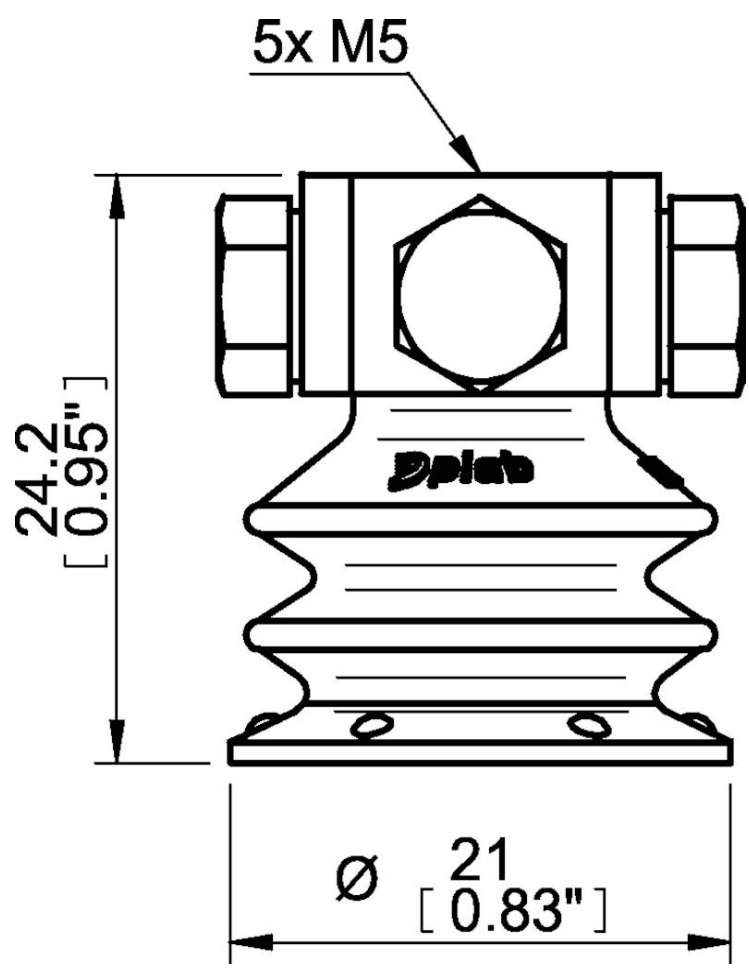

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

### **Accessories**

02AF | Fitting G1/8" male/M5 female, with mesh filter

BX20P.4K | Suction cup BX20P Polyurethane 30/60

02AA | Fitting M5 female

02AB | Fitting G1/8" male, with mesh filter

02AC | Fitting 1/8" NPT male, with mesh filter

02DD | Fitting G1/8" male/M5 female, with dual flow control valve

### **Spare parts**

02AE | Fitting 5xM5 female

BX20P.4E | Suction cup BX20P Polyurethane 60