

Suction cup BXF75P Polyurethane 60, G3/8" female with mesh filter, 17 mm thread

Item number: BXF75P.5Y.G78MR



Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Oily sheet metal
Suction cup design	-	Round
Characteristics	-	Oily sheet metal
Material	-	Polyurethane (PU)
Weight, min.	oz	4.37
Suction cup model	-	BXF
Volume	in ³	6.41
Height	in	3.38
Outer diameter, min.	in	2.95
Outer diameter, actuated	in	3.031
Fitting size	-	3/8"
Fitting option	-	Filter mesh
Fitting style	-	Female
Fitting type	-	G-thread
Fitting material	-	Al
Suction cup model	-	BXF75P Dry metal sheet
Movement, vertical max.	in	1.69
Curve radius, min.	in	4.33
Suction cup model	-	BXF75P Oily metal sheet
Movement, vertical max.	in	1.69
Curve radius, min.	in	4.33

Performance - Lifting forces


BXF75P Dry metal sheet	Vertical (lb)	Parallel (lb)
17.72 -inHg	25.85	16.41
26.58 -inHg	34.62	17.76
BXF75P Oily metal sheet		
17.72 -inHg	26.30	15.96
26.58 -inHg	34.40	17.086

Material	
Name	Polyurethane (PU60)
Color	Orange
Temperature, min. °F	50.0
Temperature max. °F	122.0
Hardness °Shore A	60

Material resistance

Alcohol	n/a
Concentrated acids	Fair
Ethanol	Fair
Hydrolysis	Fair
Methanol	Poor
Oil	Excellent
Oxidation	Poor
Gasoline	Fair
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

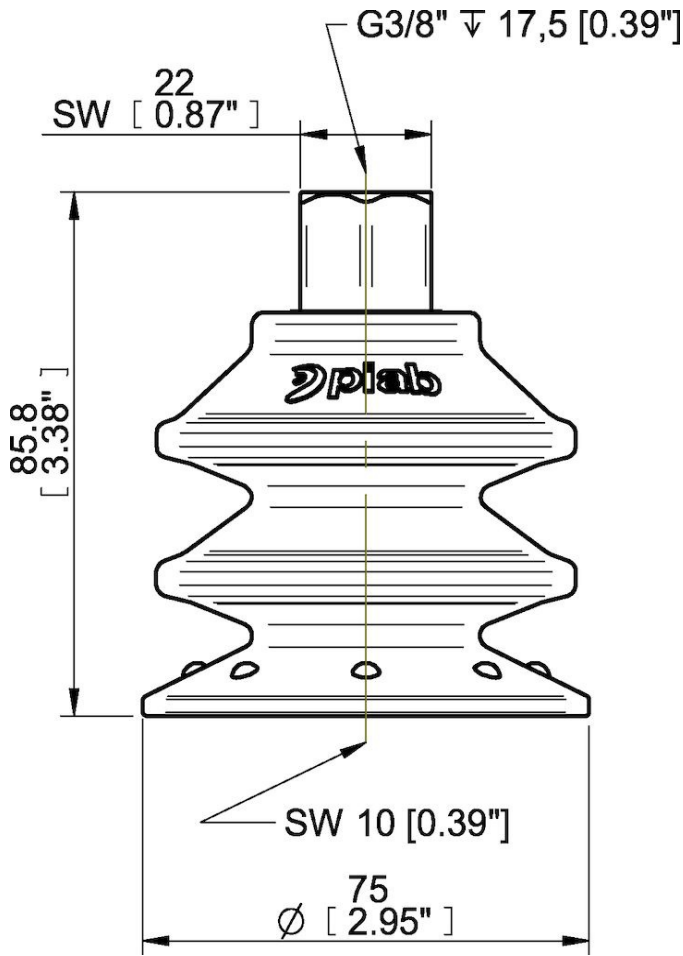

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] $\pm$ 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] $\pm$ 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.