


Suction cup F75P Polyurethane 30/60

Item number: F75P.4K

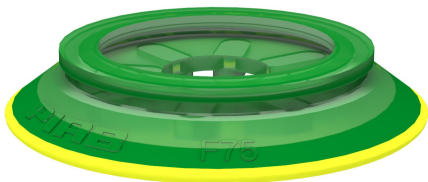

- Suitable for flat and rough surfaces.
- Fair stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.
- Dual hardness allowing strength and stability in conjunction with softness and flexibility.
- DURAFLEX® material features the elasticity of rubber in combination with the wear resistance of polyurethane.
- The DURAFLEX® material is mark-free.

Technical data


Description	Unit	Value
Suction cup shape	-	Flat
Application	-	Dry sheet metal, Mark Free
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Mark free
Material	-	Polyurethane (PU)
Weight, min.	oz	0.99
Suction cup model	-	F
Volume	in³	1.16
Height	in	0.51
Outer diameter, min.	in	3.031
Outer diameter, actuated	in	3.15
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	F75P PU30 PU60
Movement, vertical max.	in	0.079
Curve radius, min.	in	5.91

Performance - Lifting forces

F75P PU30 PU60	Vertical (lb)	Parallel (lb)
5.91 -inHg	15.74	9.89
17.72 -inHg	43.39	39.57
26.58 -inHg	61.37	69.24

Material		
Name	Polyurethane (PU30)	Polyurethane (PU60)
Color	Yellow	Green transparent
Temperature, min. °F	50.0	50.0
Temperature max. °F	122.0	122.0
Hardness °Shore A	30	60
Material resistance		
Alcohol	n/a	n/a
Concentrated acids	Fair	Fair
Ethanol	Fair	Fair
Hydrolysis	Fair	Fair
Methanol	Poor	Poor
Oil	Excellent	Excellent
Oxidation	Poor	Poor
Gasoline	Fair	Fair
Wear resistance	Excellent	Excellent
Weather and ozone	Excellent	Excellent

Dimensional drawings

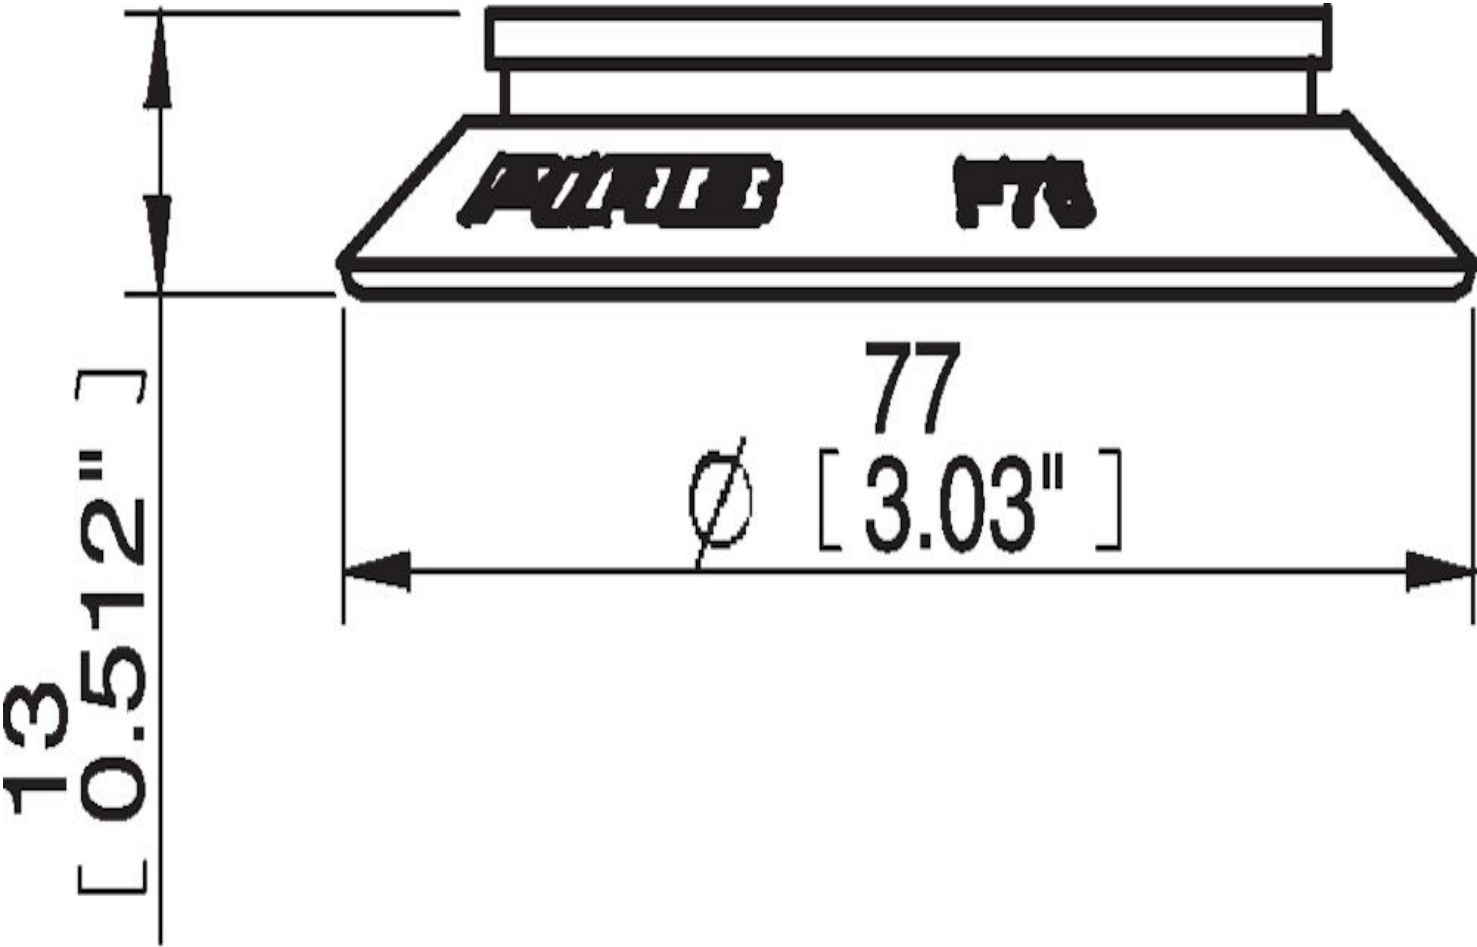

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Spare parts

- 07NA | Fitting 75, 1/8" NPSF female, clamp ring with mesh filter
- 07ND | Fitting 75, G3/8" female, clamp ring with mesh filter
- 07VD | Fitting 75, G3/8" female, with cone valve
- 07NE | Fitting 75, 3/8" NPSF female, with mesh filter
- 07NF | Fitting 75, G1/2" female, clamp ring with mesh filter
- 01.00.729 | Cone Valve for Fitting 75