

Datasheet

Ball joint fitting G3/8", limited movement

Item number: X7026




- Fitted to a suction cup to avoid bending stress.
- Non-leaking design to work with Vacuum Check Valve and Vacustat.
- Available in a loose-fit, a locking version or one with 5° movement.

Technical data

Description	Unit	Value
Material	-	CuZn, Nitrile (NBR), SS, Zn
Bending torque, max.	lb ft	180.69
Load, vertical, max.	lbf	505.82
Movement, angular	°	±6
Temperature, max.	°F	158.0
Temperature, min.	°F	-22.0
Weight, max.	oz	13.86
Weight, min.	oz	12.27

Dimensional drawings

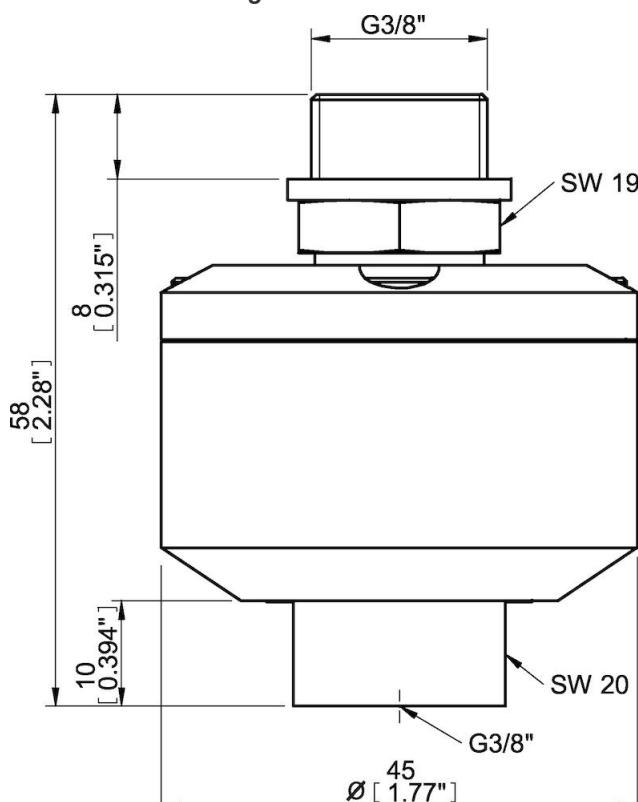

Accessories

01.21.240 | Adapter fitting G3/8" male x 3/8" NPT male