

Datasheet

Suction cup BFFT23P Polyurethane 60/60/30, T-slot

Item number: BFFT23P.5V.T3W



Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Oily sheet metal
Suction cup design	-	Round
Characteristics	-	Oily sheet metal
Material	-	Polyurethane (PU)
Weight, min.	oz	0.85
Suction cup model	-	BFFT
Volume	in ³	0.066
Height	in	0.81
Height 2 (Actuated)	in	0.62
Outer diameter, min.	in	0.91
Outer diameter, actuated	in	0.94
Fitting style	-	T-slot
Fitting material	-	Al (anodized)
Suction cup model	-	BFFT23 Dry metal sheet
Movement, vertical max.	in	0.20
Curve radius, min.	in	0.35
Suction cup model	-	BFFT23 Oily metal sheet
Movement, vertical max.	in	0.20
Curve radius, min.	in	0.35

Performance - Lifting forces


	Vertical (lb)	Parallel (lb)
BFFT23 Dry metal sheet		
17.72 -inHg	4.27	3.37
26.58 -inHg	6.070	4.27
BFFT23 Oily metal sheet		
17.72 -inHg	3.82	2.023
26.58 -inHg	5.17	2.70

Material			
Name	Polyurethane (PU30)	Polyurethane (PU60)	Polyurethane (PU60)
Color	Yellow	Green transparent	Orange
Temperature, min. °F	50.0	50.0	50.0
Temperature max. °F	122.0	122.0	122.0
Hardness °Shore A	30	60	60

Material resistance

Alcohol	n/a	n/a	n/a
Concentrated acids	Fair	Fair	Fair
Ethanol	Fair	Fair	Fair
Hydrolysis	Fair	Fair	Fair
Methanol	Poor	Poor	Poor
Oil	Excellent	Excellent	Excellent
Oxidation	Poor	Poor	Poor
Gasoline	Fair	Fair	Fair
Wear resistance	Excellent	Excellent	Excellent
Weather and ozone	Excellent	Excellent	Excellent

Dimensional drawings

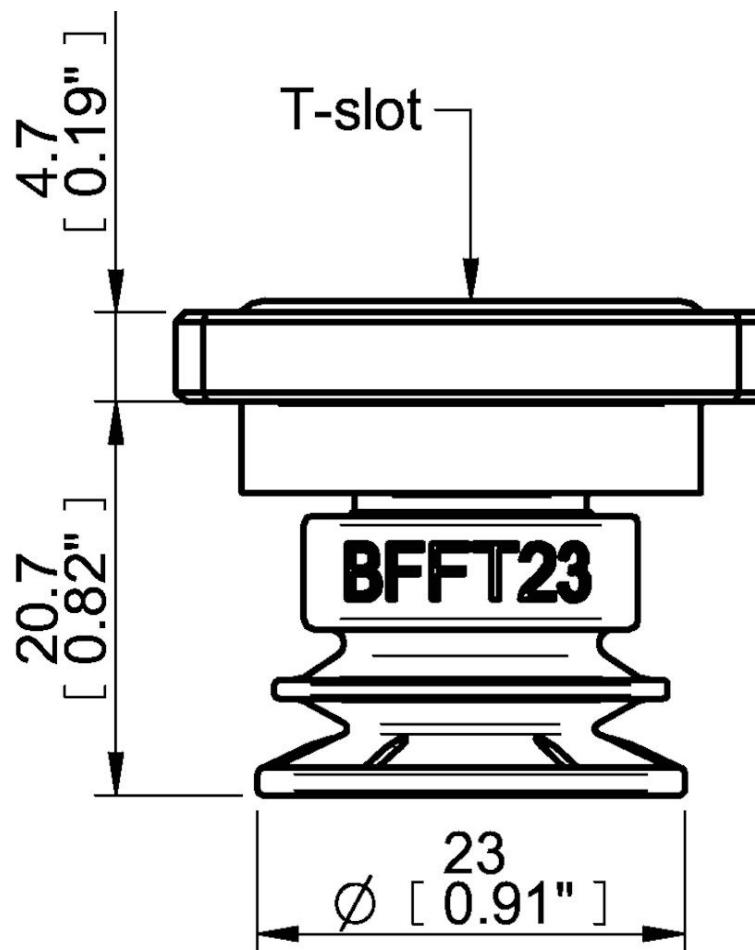

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.