


Drives

WV151 - WV310





- Vibration compensation with rubber buffer
- Heavier bowls can be used due to coarser vibration behavior

Overview of WV attachment with levelling base

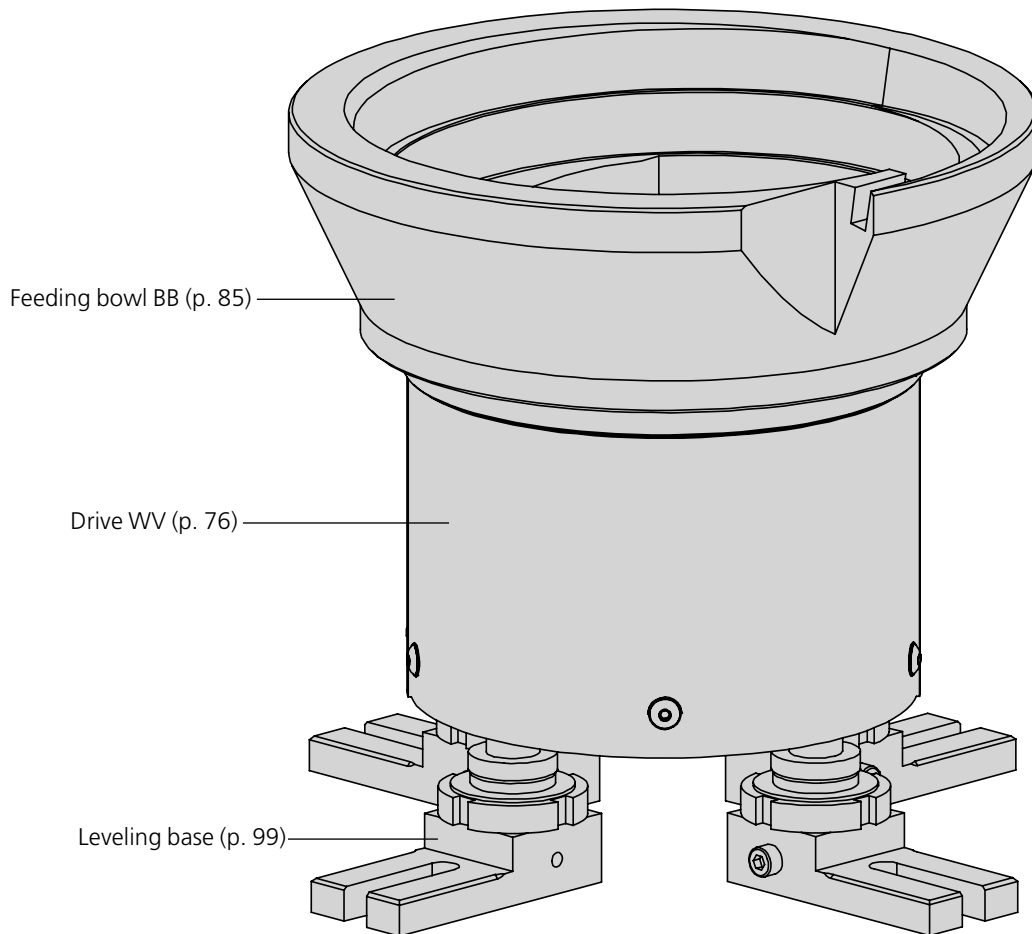

Type	WV151-1	WV201-1	WV310-1
A	146 mm	194 mm	294 mm
D1	M6	M8	M8
D2	4 x M5	4 x M6	4 x M6
E	120 mm	160 mm	226 mm
H	110 mm	180 mm	180 mm

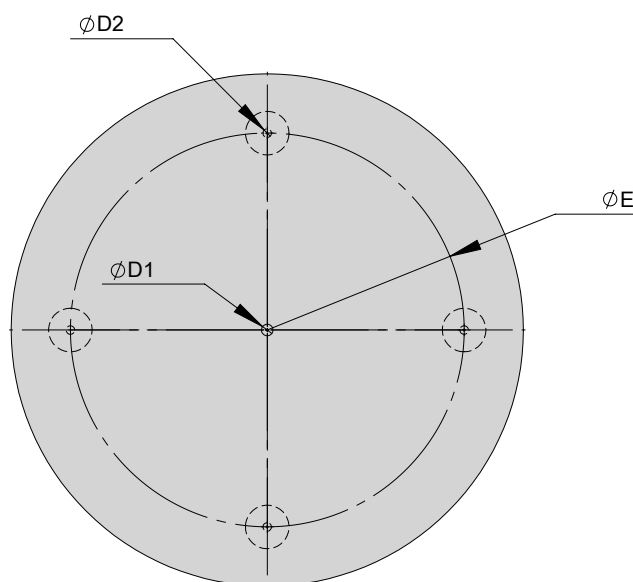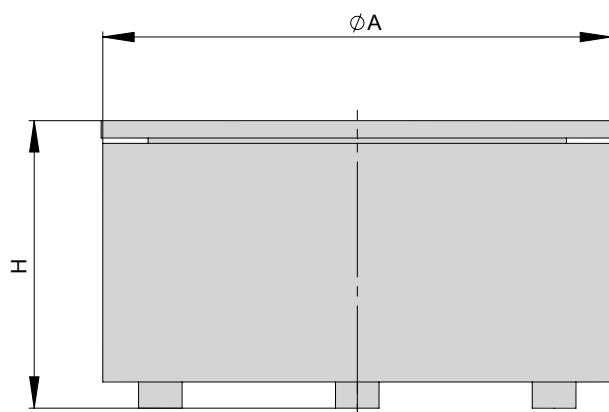

WV151 - WV310	
Operating temperature	10 - 45 °C

Type	WV151-1	WV151-1	WV151-1	WV151-1
Order number	11015891	11015890	11005657	11005656
Mechanical vibration frequency	100 Hz	100 Hz	100 Hz	100 Hz
Mains connection (mains voltage/mains frequency)	230 V/50 Hz *	230 V/50 Hz *	230 V/50 Hz *	230 V/50 Hz *
Max. power consumption	66 VA	66 VA	66 VA	66 VA
Net weight	5.4 kg	5.4 kg	5.4 kg	5.4 kg
Admissible bowl weight ± 30 %	1.1 kg	1.1 kg	1.1 kg	1.1 kg
Angle of the gradient of the leaf springs	20 °	20 °	25 °	25 °
Delivery direction	right	left	right	left
Protection type	IP54	IP54	IP54	IP54

Type	WV201-1	WV201-1	WV201-1	WV201-1
Order number	11015893	11015892	11005660	11005659
Mechanical vibration frequency	100 Hz	100 Hz	100 Hz	100 Hz
Mains connection (mains voltage/mains frequency)	230 V/50 Hz *	230 V/50 Hz *	230 V/50 Hz *	230 V/50 Hz *
Max. power consumption	176 VA	176 VA	176 VA	176 VA
Net weight	16.2 kg	16.2 kg	16.2 kg	16.2 kg
Admissible bowl weight ± 30 %	5 kg	5 kg	5 kg	5 kg
Angle of the gradient of the leaf springs	20 °	20 °	25 °	25 °
Delivery direction	right	left	right	left
Protection type	IP54	IP54	IP54	IP54

Type	WV310-1	WV310-1	WV310-1	WV310-1
Order number	11015895	11015894	11005666	11005665
Mechanical vibration frequency	100 Hz	100 Hz	100 Hz	100 Hz
Mains connection (mains voltage/mains frequency)	230 V/50 Hz *	230 V/50 Hz *	230 V/50 Hz *	230 V/50 Hz *
Max. power consumption	176 VA	176 VA	176 VA	176 VA
Net weight	37.6 kg	37.6 kg	37.7 kg	37.7 kg
Admissible bowl weight ± 30 %	7.5 kg	7.5 kg	7.5 kg	7.5 kg
Angle of the gradient of the leaf springs	20 °	20 °	25 °	25 °
Delivery direction	right	left	right	left
Protection type	IP54	IP54	IP54	IP54

* Other electr. configurations on request

Included in delivery

- 4x Leaf spring WV
- 8x Spacers WV